

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

10/520906

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number  
WO 2004/005693 A1

(51) International Patent Classification<sup>7</sup>: F02M 27/04

(21) International Application Number:  
PCT/KR2002/002111

(22) International Filing Date:  
12 November 2002 (12.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002-39706 9 July 2002 (09.07.2002) KR  
2002-56941 18 September 2002 (18.09.2002) KR

(71) Applicant and

(72) Inventor: KIM, Sung, Mo [KR/KR]; 533-35, Deung-  
chon-2-dong, Kangseo-gu, 157-836 Seoul (KR).

(74) Agents: KIM, Byung, Jin et al.; #201 Hwajin Bldg., 828  
Yoksam-dong, Kangnam-gu, 135-080 Seoul (KR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CO, CR, CU, CZ,  
DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM,  
HR, HU, IL, IN, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS,  
LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO,  
NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SI, SK,  
SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,  
YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: A DEVICE FOR REDUCTION OF EXHAUST GAS AND FUEL ECONOMY FOR AN INTERNAL-COMBUSTION ENGINE

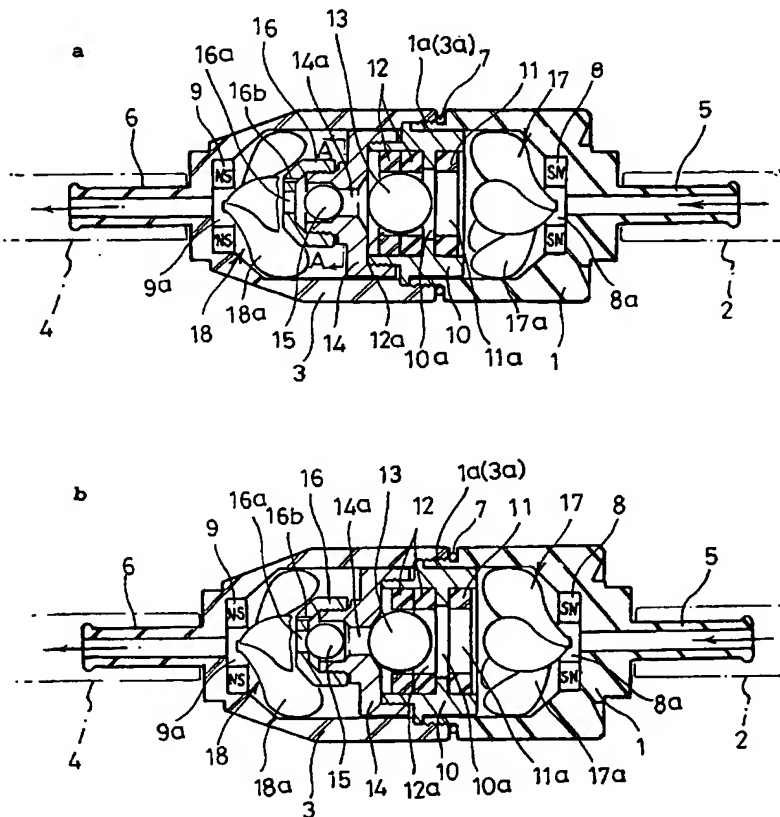

(57) Abstract: The present invention provides a device for reduction of exhaust gas and fuel economy which comprises a pair of diffusion fans (17, 18), a plurality of permanent magnets (8, 9, 11, 12) and metallic balls (13, 15) to cause the complete combustion of the fuel by its repeated diffusion and turning into particulates. According to the present invention, by complete combustion of the fuel, fuel economy and power output of an engine can be significantly enhanced and the exhaust gas can be considerably reduced.

**WO 2004/005693 A1**



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**A DEVICE FOR REDUCTION OF EXHAUST GAS AND FUEL ECONOMY  
FOR AN INTERNAL-COMBUSTION ENGINE**

**5 FIELD OF THE INVENTION**

The present invention relates to a device for reduction of exhaust gas and fuel economy for an internal-combustion engine. More particularly, the present invention relates to a device for reduction of exhaust gas and fuel economy, which is mounted on a fuel supply line of an internal-combustion engine to compress and diffuse fuel and also to make molecules of the fuel particulates, thus resulting in complete combustion of the fuel.

15

**BACKGROUND OF THE INVENTION**

Generally, fuel-air mixture is supplied to an internal combustion engine of vehicles such as automobiles and ships, and it has been required that the mixture be precisely controlled to satisfy the needs of reduction of exhaust gas, fuel economy, and the increase of power output.

A fuel injector applied to an internal-combustion engine electrically detects the amount of air intake and then injects fuel depending on the detected amount

of air intake and conditions of operation of the engine.  
For this purpose, the fuel injector includes a control  
unit.

The injector injects fuel into an intake manifold  
5 of each cylinder according to signals received from the  
control unit, and comprises solenoid coil, a plunger  
and a needle valve. When current flows into the  
solenoid coil, the plunger is drawn and the needle  
valve integrally formed with the plunger is pulled such  
10 that an injecting nozzle is opened to inject the fuel.

The amount of the injected fuel depends on the  
time when the needle valve is open, i.e., the time  
during which current flows in the solenoid coil.

An electric circuit which controls the injector  
15 is largely divided into a voltage controlled circuit  
and a current controlled circuit, depending on whether  
a resistor is used.

In the meantime, a fuel economizer which raises  
swirl of the fuel injected from the injector is mounted  
20 on an inlet portion of the engine, and various forms of  
the fuel economizer have been known.

The fuel injected from the injector raises swirl  
in a combustion chamber while passing through the fuel  
economizer, and so-called "lean burn" which means that

mixture ratio, in other words the fuel-air mixture becomes diluted is caused in the vicinity of an ignition plug, and accordingly the increase of the power output and the fuel economy effects can be  
5 achieved by the complete combustion.

However, although such a conventional fuel economizer caused the fuel economy effect due to the complete combustion and the simultaneous explosive power stroke resulted from the lean burn, since the  
10 swirl was not so strong and could not change the nature of the fuel itself, the fuel economy effect could not be obtained as much as expected.

#### **SUMMARY OF THE INVENTION**

15 The present invention substantially obviates one or more of the problems encountered due to limitations and disadvantages of the prior art.

The object of the present invention is to provide a device for reduction of exhaust gas and fuel economy  
20 for an engine, which comprises a pair of diffusion fans, a plurality of permanent magnets and metallic balls to cause the complete combustion of the fuel by its repeated diffusion and turning into particulates.

Another object of the present invention is to

provide a device for reduction of exhaust gas and fuel economy, which can reduce the amount of exhaust gas and simultaneously improve the power output of the engine by the complete combustion of fuel.

5           To achieve these objects and other advantages of the present invention, the device for reduction of exhaust gas and fuel economy according to the present invention comprises:

an inlet housing connected to a fuel pipe of a  
10 fuel tank; a first permanent magnet fitted in the inlet housing and having a hole in the center thereof; an outlet housing coupled with the inlet housing by coupling means at one end and connected to a fuel pipe to an engine at the other end; a second permanent  
15 magnet fitted in the outlet housing to have the same pole opposing the first permanent magnet and having a hole in the center thereof; a partition located between the housings to separate them and having a hole for passing the fuel in the center thereof; a third  
20 permanent magnet mounted on one side of the partition and having a hole in the center thereof; a fourth permanent magnet mounted on the other side of the partition and having a hole in the center thereof; a first ball inserted in the hole of the fourth permanent

magnet and moving back and forth to turn the fuel into particulates; a sleeve mounted on the other side of the partition and having a hole for passing the fuel in the center thereof; a second ball inserted in the hole for  
5 passing the fuel of the sleeve and moving back and forth by magnetic force of the fourth permanent magnet, to turn the fuel into particulates; a cap mounted on one side of the sleeve and having a hole for passing the fuel in the center thereof and a plurality of fuel  
10 supply holes in its periphery to supply the fuel to a combustion chamber when the hole for passing the fuel of the sleeve is opened by stepping on an accelerator; a first diffusion fan mounted in the inlet housing to diffuse the fuel; and a second diffusion fan mounted in  
15 the outlet housing to further diffuse the fuel.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and  
20 are incorporated in and constitute a part of this specification, illustrate an embodiment of the invention and together with the description serve to explain the principles of the invention, wherein:

FIG. 1 is a disassembled perspective view of the

device according to the present invention.

FIGs. 2a and 2b are vertical sectional views of FIG. 1 in an assembled state, wherein FIG. 2a shows the state of the device according to the present invention without stepping on an accelerator, and FIG. 2b shows the state with stepping on the accelerator.

FIG. 3 is a sectional view along the line A-A in FIG. 2a.

#### 10 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

According to the present invention, the device for reduction of exhaust gas and fuel economy comprises:

an inlet housing (1) connected to a fuel pipe (2) of a fuel tank; a first permanent magnet (8) fitted in the inlet housing (1) and having a hole (8a) in the center thereof; an outlet housing (3) coupled with the inlet housing (1) by coupling means at one end and connected to a fuel pipe (4) to an engine at the other end; a second permanent magnet (9) fitted in the outlet housing (3) to have the same pole opposing the first permanent magnet (8) and having a hole (9a) in the center thereof; a partition (10) located between the housings (1 and 3) to separate them and having a hole



for passing the fuel (10a) in the central thereof; a third permanent magnet (11) mounted on one side of the partition (10) and having a hole (11a) in the center thereof; a fourth permanent magnet (12) mounted on the other side of the partition (10) and having a hole (12a) in the center thereof; a first ball (13) inserted in the hole (12a) of the fourth permanent magnet (12) and moving back and forth to turn the fuel into particulates; a sleeve (14) mounted on the other side of the partition (10) and having a hole for passing the fuel (14a) in the center thereof; a second ball (15) inserted in the hole for passing the fuel (14a) of the sleeve (14) and moving back and forth by magnetic force of the fourth permanent magnet (12) to turn the fuel into particulates; a cap (16) mounted on one side of the sleeve (14) and having a hole for passing the fuel (16a) in the center thereof and a plurality of fuel supply holes (16b) in its periphery to supply the fuel to a combustion chamber when the hole for passing the fuel (14a) of the sleeve (14) is opened by stepping on an accelerator; a first diffusion fan (17) mounted in the inlet housing (1) to diffuse the fuel; and a second diffusion fan (18) mounted in the outlet housing (3) to further diffuse the fuel.

More specifically, the fuel pipe (2) of the fuel tank is connected to the inlet housing (1), and the inlet housing (1) is coupled with one end of the outlet housing (3) by coupling means, which in turn is  
5 connected to the fuel pipe (4) of the engine at the other end thereof. To connect each of the fuel pipes (2 and 4) with each of the corresponding housings (1 and 3), a nipple (5 or 6) can be formed integrally with the housing (1 or 3) or can be formed separately from the  
10 housing (1 or 3) to be coupled by screw.

According to an embodiment of the present invention, in order to connect the housings (1 and 3), a male screw (1a) and a female screw (3a) are used as the coupling means, and an O-ring (7) is inserted in  
15 the site of coupling the housings (1 and 3) to secure tightness.

The first permanent magnet (8) is fitted into the inlet housing (1) and has the hole (8a) at the center thereof, and the second permanent magnet (9) is fitted  
20 into the outlet housing (3) and also has the hole (9a) in the center thereof. The second permanent magnet (9) is arranged in the outlet housing (3) such that its one pole may have the same polarity as the opposing pole of the first permanent magnet (8), as shown in FIGs. 2a

and 2b.

The partition (10) is placed between the two housings (1 and 3) to divide the inside of the housings (1 and 3) and includes the hole for passing the fuel (10a) formed in the center thereof.

Also, on one side of the partition (10) into which the fuel enters, the third permanent magnet (11) having the hole (11a) in the center thereof is arranged in such a manner that its one pole may have the same polarity as an opposing pole of the first permanent magnet (8). On the other side of the partition (10) from which the fuel goes out, the fourth permanent magnet (12) having the hole (12a) in the center thereof is provided in such a manner that its one pole may have the same polarity as an opposing pole of the second permanent magnet (9).

The first ball (13) made of metallic material (magnetic material) is inserted into the hole (12a) of the fourth permanent magnet (12) to keep a predetermined interval (t) with the hole (12a). The first ball (13) is to supply the fuel of a predetermined quantity to the combustion chamber by turning the fuel into particulates. It is preferable that the interval (t) is about 0.05 to 1.0mm.

If the interval is less than about 0.05mm, the fuel cannot be sufficiently supplied, so that the fuel pump will be overloaded and impaired. To the contrary, if the interval is more than about 1.0mm, turning of  
5 the fuel into particulates will be limited, and it will result in low efficiency.

Preferably, gauss ( $\text{\AA}$ ) of the fourth permanent magnet (12) should be set to have larger gauss than the third permanent magnet (11). This is to maintain the  
10 first ball (13) inside the hole (12a).

For this purpose, according to the embodiment of the present invention, the fourth permanent magnet (12) is composed of two permanent magnets having the same gauss. However, the invention is not necessarily  
15 limited to the embodiment.

This is because, although the first ball (13) had been placed in the hole (11a) of the third permanent magnet (11) before starting an engine, when the fuel pump is driven by starting the engine, the first ball  
20 (13) moves towards the hole (12a) of the fourth permanent magnet (12) by the pumping force of the fuel.

One end of the sleeve (14) having the hole for passing the fuel (14a) in the center thereof is coupled

with the other end of the partition (10) by screw.  
Inside the hole for passing the fuel (14a) of the  
sleeve (14), the second ball (15) is provided. The  
second ball (15) moves back and forth by the magnetic  
5 force of the fourth permanent magnet (12) to open and  
close the hole for passing the fuel (14a). The other  
end of the sleeve (14) is coupled with the cap (16) by  
screw. The cap (16) includes the hole for passing the  
fuel (16a) in the center thereof and a plurality of  
10 fuel supply holes (16b) in the periphery thereof.

As described above, when the first ball (13) made  
of metallic material is arranged in the hole (12a) of  
the fourth permanent magnet (12), the magnetic force  
flowing in the hole (12a) keeps the first ball (13) at  
15 a predetermined interval from the hole (12a).

In addition, inside the inlet housing (1), the  
first diffusion fan (17) is provided to diffuse the  
fuel injected by the driving of the fuel pump, and  
inside the outlet housing (3), the second diffusion fan  
20 (18) is provided to further diffuse the fuel.

The first and the second diffusion fans (17 and  
18) respectively have a plurality of diffusion wings  
(17a and 18a) in the form of propellers and they are  
arranged to symmetrically oppose each other, so that

the fuel can collide against the diffusion wings (17a and 18a) to form swirl and to be turned into particulates.

The diffusion wings (17a and 18a) are connected  
5 to the inner walls of the inlet housing (1) and the outlet housing (3), respectively, in order to maximize the diffusion of the fuel in the inlet and outlet housings (1 and 3) while the fuel is colliding against the diffusion wings (17a and 18a).

10 The operation of the device according to the present invention will be described.

When the device for reduction of exhaust gas and fuel economy of the present invention is installed in the fuel supply line of an automobile, the second ball  
15 (15) closes the hole for passing the fuel (14a) of the sleeve (14) due to the magnetic force of the fourth permanent magnet (12) as shown in FIG. 2a.

Then, if the fuel pump is driven by starting the engine, the fuel is introduced into the inlet housing  
20 (1) by the pumping force of the fuel pump. Then, the fuel passes through the hole (8a) formed in the center of the first permanent magnet (8) and collides against the diffusion wings (17a) of the first diffusion fan (17). The fuel which has been diffused by the diffusion

wings (17a) passes through a gap having the interval (t) formed between the hole (12a) of the fourth permanent magnet (12) and the first ball (13), and is turned into particulates.

5           When the fuel passing the gap between the hole (12a) and the first ball (13) reaches the hole for passing the fuel (14a) of the sleeve (14), the second ball (15) which has been closing the hole for passing the fuel (14a) by the magnetic force of the fourth  
10 permanent magnet (12) as mentioned above, moves from the hole for passing the fuel (14a) by the pumping force of the fuel to form a gap, through which the fuel further turns into particulates. The particulate fuel is then supplied to the outlet housing (3) by passing  
15 the hole for passing the fuel (16a) and the fuel supply holes (16b) of the cap (16). Finally, the second diffusion fan (18) further diffuses the fuel in the outlet housing (3), and thus the combustion chamber can conduct the complete combustion of the fuel.

20           The above description explains the state of idling before the driver steps on an accelerator.

When the driver steps on the accelerator, the first ball (13) which has been inside the hole (12a) of the fourth permanent magnet (12) moves in the direction

of supply of the fuel as shown in FIG. 2b, due to the pressure difference generated by the pressure of the fuel pump, and pushes the second ball (15) which has been closing the hole for passing the fuel (14a) of the sleeve (14), so that the hole for passing the fuel (14a) can be opened and simultaneously the hole for passing the fuel (16a) of the cap (16) can be closed. By the closing of the hole for passing the fuel (16a), the cross sectional area through which the fuel passes is decreased, but the pumping pressure of the fuel becomes increased, and thus the fuel is rapidly supplied to the combustion chamber through a plurality of the fuel supply holes (16b). More fuel can be supplied to the combustion chamber in the same period of time than in the state of idling where the driver is not stepping on an accelerator.

Finally, the diffusion wings (18a) of the diffusion fan (18) further diffuse the fuel, and thus it becomes possible to combust the fuel completely in the combustion chamber.

The present invention has various advantages compared to conventional fuel economizers.

Firstly, by the complete combustion of the fuel, a significant amount of fuel can be saved and a



remarkable effect of fuel economy can be achieved.

According to the test using the device for fuel economy of the present invention, an automobile was driven at the speed of 80Km/hr using and without using  
5 the device of the present invention, and the fuel consumptions under both conditions were measured and compared. The test result showed the fuel economy effect of 15% to 20% when using the device of the present invention.

10 Secondly, by the complete combustion of the fuel, the output power becomes significantly increased and it becomes possible to reduce the noise and vibration.

Thirdly, by the complete combustion of the fuel, generation of exhaust gas can be minimized and it can  
15 prevent atmospheric contamination.

**What is claimed is:**

1. A device for reduction of exhaust gas and fuel economy comprising:

an inlet housing connected to a fuel pipe of a fuel tank; a first permanent magnet fitted in the inlet housing and having a hole in the center thereof; an outlet housing coupled with the inlet housing by coupling means at one end and connected to a fuel pipe to an engine at the other end; a second permanent magnet fitted in the outlet housing to have the same pole opposing the first permanent magnet and having a hole in the center thereof; a partition located between the housings to separate them and having a hole for passing the fuel in the center thereof; a third permanent magnet mounted on one side of the partition and having a hole in the center thereof; a fourth permanent magnet mounted on the other side of the partition and having a hole in the center thereof; a first ball inserted in the hole of the fourth permanent magnet and moving back and forth to turn the fuel into particulates; a sleeve mounted on the other side of the partition and having a hole for passing the fuel in the center thereof; a second ball inserted in the hole for passing the fuel of the sleeve and moving back and

forth by magnetic force of the fourth permanent magnet,  
to turn the fuel into particulates; a cap mounted on  
one side of the sleeve and having a hole for passing  
the fuel in the center thereof and a plurality of fuel  
5 supply holes in its periphery to supply the fuel to a  
combustion chamber when the hole for passing the fuel  
of the sleeve is opened by stepping on an accelerator;  
a first diffusion fan mounted in the inlet housing to  
diffuse the fuel; and a second diffusion fan mounted in  
10 the outlet housing to further diffuse the fuel.

2. A device as claimed in claim 1, wherein each  
of the first and the second diffusion fans comprises a  
plurality of diffusion wings formed in the shape of  
15 propellers.


3. A device as claimed in claim 2, wherein the  
diffusion wings of the first and the second diffusion  
fans are respectively connected to the inner walls of  
20 the inlet housing and the outlet housing.

4. A device as claimed in claim 1, wherein the  
first ball of metallic material inserted in the hole of  
the fourth permanent magnet keeps the interval (t) of

about 0.05 to 1.0mm with the hole.


1/4

FIG. 1

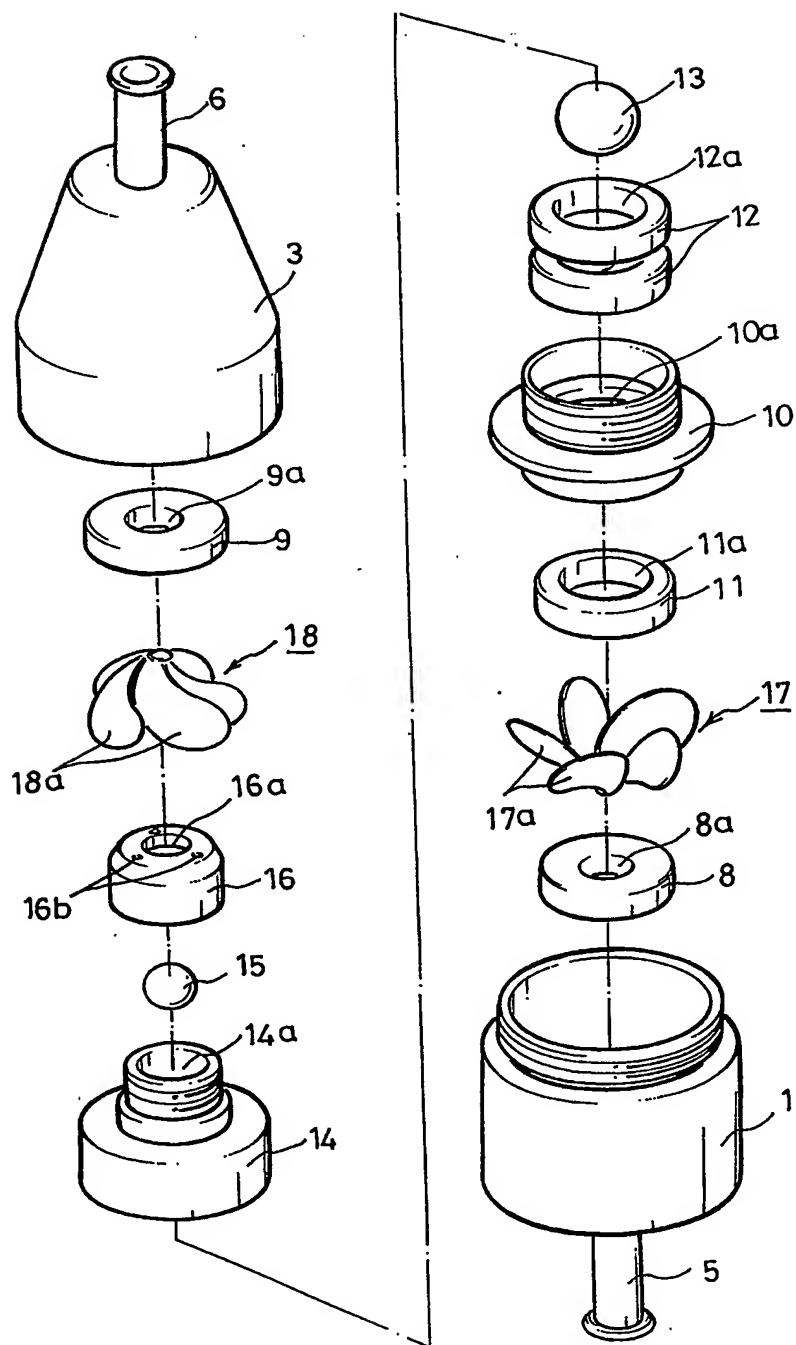


2/4

FIG. 2a

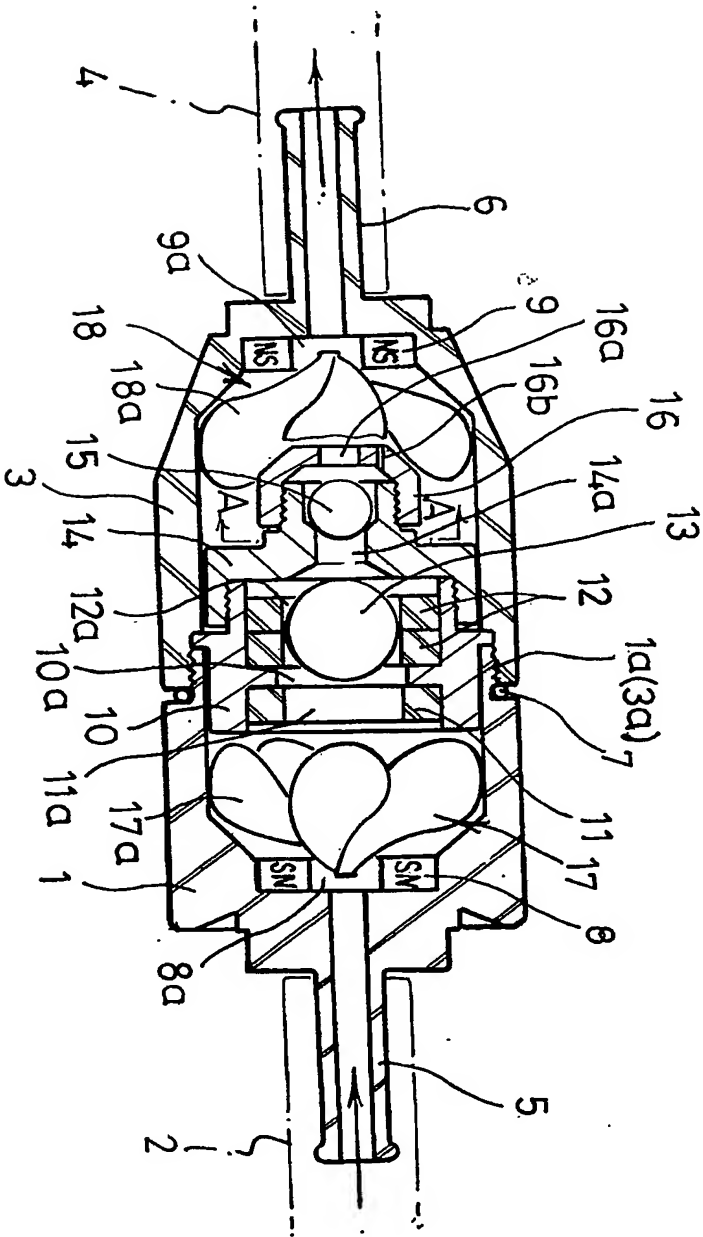


3/4

FIG. 2b

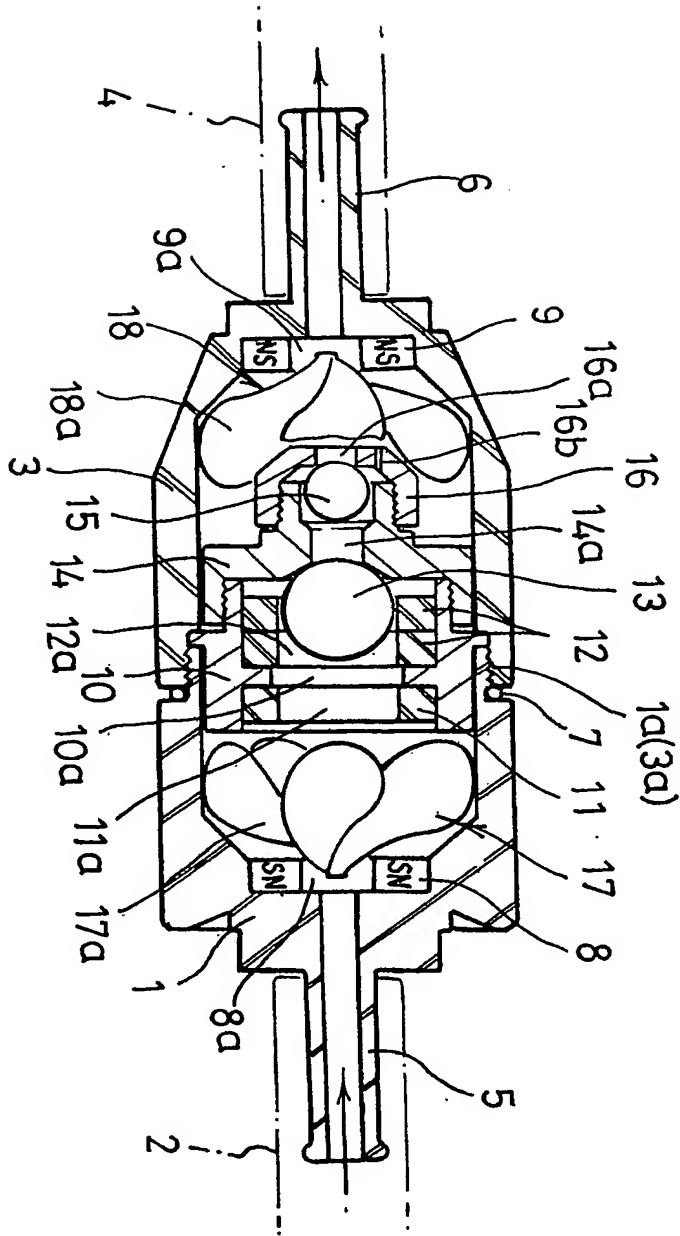

4/4

FIG. 3

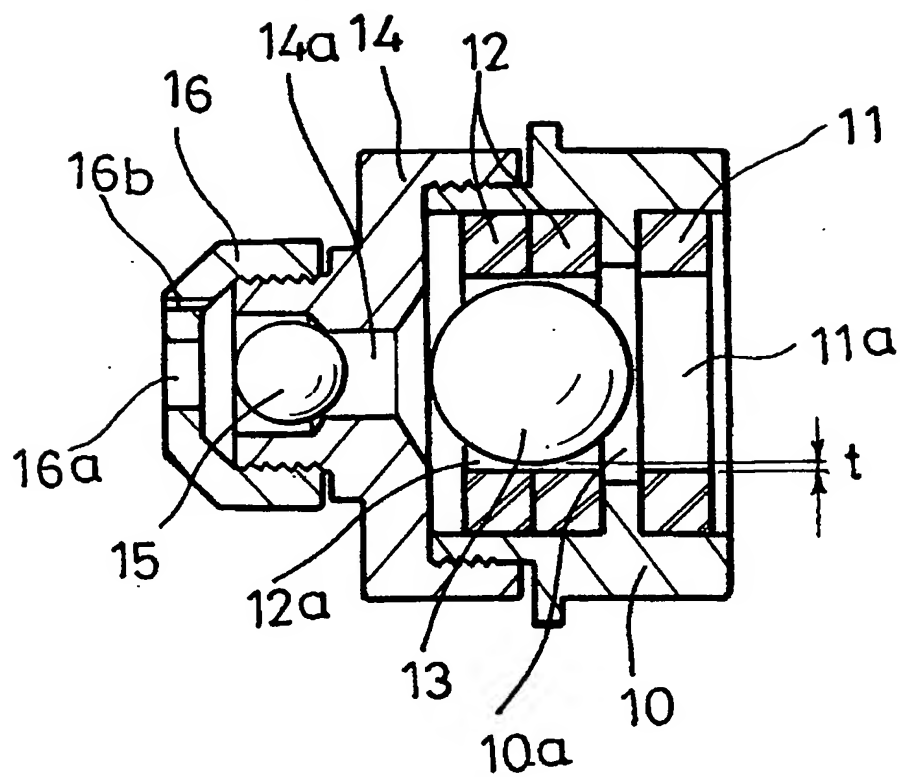



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 02/02111

## CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: F02M 27/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: F02M 27/00, 27/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0666414 A1 ( MIYAZAKI, MAKI ) 9 August 1995 (09.08.95) <i>the whole document.</i>	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

## \* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&amp;“ document member of the same patent family

Date of the actual completion of the international search

14 March 2003 (14.03.2003)

Date of mailing of the international search report

7 April 2003 (07.04.2003)

Name and mailing address of the ISA/AT

Austrian Patent Office

Kohlmarkt 8-10; A-1014 Vienna

Facsimile No. 1/53424/535

Authorized officer

PIPPAN P.

Telephone No. 1/53424/359

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/KR 02/02111

Patent document cited in search report			Publication date	Patent family member(s)			Publication date
DK	T3	666414	02-02-1998	AU	A1	11491/95	17-08-1995
EP	A1	666414	09-08-1995	AU	B2	670895	01-08-1996
EP	B1	666414	10-09-1997	CA	AA	2140088	03-08-1995
				CA	C	2140088	30-09-1997
				CN	A	1115356	24-01-1996
				CN	B	1042966	14-04-1999
				DE	C0	69500659	16-10-1997
				DE	T2	69500659	15-01-1998
				ES	T3	2106572	01-11-1997
				JP	A2	7217507	15-08-1995
				US	A	5487370	30-01-1996